

# 6234-C / 6234A-C

## SOFT SERVE FREEZER

Two Flavor, Countertop, Dual Controls  
A: Pump Feed Model



Most **Compact & Versatile**  
two-flavor countertop model with  
independent intelligent controls  
for ice cream and frozen yogurt

### Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

### Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

### Operation Logging

Logs every operation and error to provide history and data for easy troubleshooting

### Auto Programming

Allows automatic switching of operation modes based on preset schedules

### Hopper Agitators

Maintain product consistency and prevent product separation

Ideal for any restaurants, convenience stores, dessert stands and delis to serve ice cream and gelato. Small foot print and low energy consumption help reduce operating cost.

### Soft System Start

Slow motor start reduces equipment noise and stress on drive train

### Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

### Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

### Quick Refreeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

### Self Closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control


### Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



# 6234-C / 6234A-C

## SOFT SERVE FREEZER

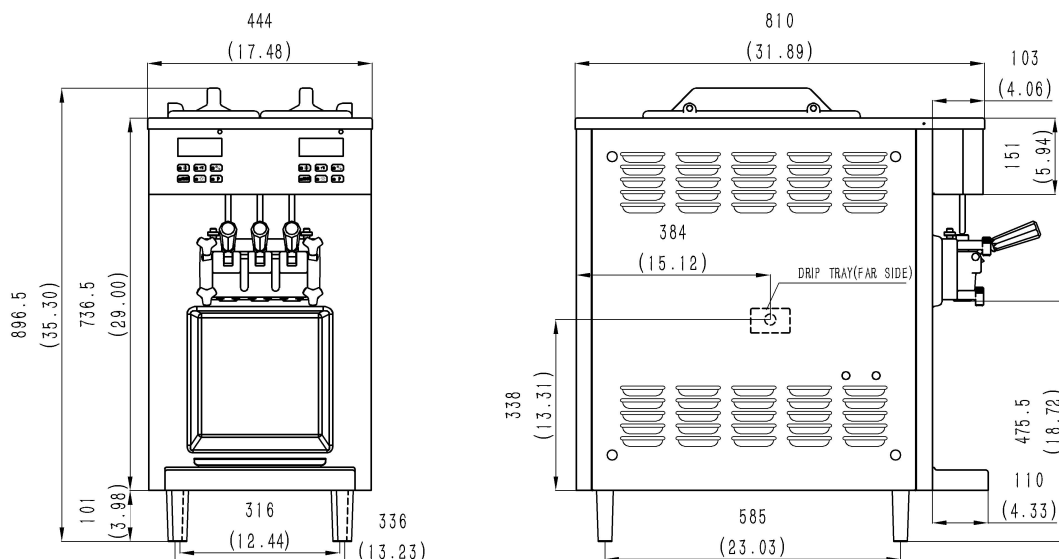

### SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.2L / 1.3qt
Mix Hoppers	2 x 8.0L (5L for A)
Output Capacity (80 grams)	280 serves/hr
Clearance Requirements	None

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
--------	-----------------	--------------

Net	126 / 280	135 / 300
-----	-----------	-----------

Shipping	141 / 313	150 / 330
----------	-----------	-----------

Volume	0.48 CBM / 16.95 CBF
--------	----------------------

Dimensions	Net (mm/in)	Shipping (mm/in)
------------	-------------	------------------

Width	444 / 17.5	530 / 20.9
-------	------------	------------

Depth	810 / 31.9	830 / 32.7
-------	------------	------------

Height	897 / 35.3	1080 / 42.5
--------	------------	-------------

Electrical	MFS	MCA	Power(kW)
------------	-----	-----	-----------

220-240/50/1	15	10	1.8
--------------	----	----	-----

208-230/60/1	15	10	1.8
--------------	----	----	-----

### FEATURES

Control Systems	Double, Digital
-----------------	-----------------

Refrigerated Hoppers	✓
----------------------	---

Hopper Agitator	✓
-----------------	---

Temperature Display	✓
---------------------	---

Standby Mode	✓
--------------	---

Auto Closing Dispensing Valves	✓
--------------------------------	---

Dispensing Speed Control	✓
--------------------------	---

Low Mix Indicator Light & Alarm	✓
---------------------------------	---

Low Temperature Protection	✓
----------------------------	---

Motor Overload Protection	✓
---------------------------	---

High Pressure Protection	✓
--------------------------	---

Defrost & Quick Refreeze	✓
--------------------------	---

Soft Start	✓
------------	---

Direct Drive Pump (A only)	✓
----------------------------	---

### AVAILABLE OPTIONS

Water Cooled	✓
--------------	---

Cart (Trolley)	✓
----------------	---

• Above specifications are subject to change without notice

### SPACEMAN USA

224 Commerce St. Unit A1,  
Broomfield, CO 80020

PHONE: +01 720-328-1020 FAX: +01 720-528-8113

Email: sales@spacemanusa.com

www.spacemanusa.com

8/2018